

GPVP-25 series

25W Constant Voltage LED Power Supply with PFC function



■ Features:

- Constant voltage design
- Universal AC input range
 - Built-in PFC function
- Protections: Overload / Over voltage / Short circuit / Over Temperature
- Cooling by free air convection
 - Isolation class II
- Double insulation of Input and output wires
 - IP67 Protection level [5]

tc: 90°C
ta: 50°C CONSTANT VOLTAGE

SELV      IP67

◎ ELECTRICAL SPECIFICATION

MODEL	GPVP-25-12	GPVP-25-24
OUTPUT		
Rated Voltage	12V	24V
Rated Current	2A	1A
Current Range	0 ÷ 2A	0 ÷ 1A
Rated Power	25W	
Line Regulation	± 1%	
Load Regulation	± 2%	
Tolerance [3]	± 3%	
Ripple & Noise (max.) [2]	200mV _{p-p}	
Setup, Rise Time [4]	500ms, 15ms / 230VAC at full load	
Hold up Time (typ.)	20ms / 230VAC at full load	

INPUT		
Voltage Range	90 ÷ 264VAC	
Frequency Range	47 ÷ 63Hz	
Efficiency (typ.)	84%	87%
AC Current (typ.)	0.32A / 115VAC, 0.15A / 230VAC	
Power Factor (typ.)	PF > 0.9 / 230VAC; PF > 0.95 / 115VAC	
Leakage Current (max.)	0.25mA / 240VAC	

PROTECTIONS		
Overload	Range: 100-110% rated power Type: hiccup mode, auto-recovery.	
Short Circuit	Type: hiccup mode, auto-recovery.	
Over Voltage	Range: 14-19V Type: hiccup mode, auto-recovery.	Range: 28-39V
Over Temperature	140°C±10°C(detect on main control IC) Type: hiccup mode, auto-recovery.	

GPVP-25 series

25W Constant Voltage LED Power Supply with PFC function



WORKING ENVIRONMENT

Working Temperature	-30°C ÷ 70°C (refer to Derating Curve), ta: 50°C; tc: 90°C
Working Humidity	20 ÷ 90% RH non-condensing
Storage Temperature and Humidity	-30°C ÷ 80°C, 10 ÷ 95% RH non-condensing

SAFETY and EMC REGULATIONS

Safety Standards	Compliance to EN 61347-1, EN 61347-2-13
Withstand Voltage	IN/OUT: 3kVAC
Isolation Resistance	IN/OUT: 100MΩ/500VDC/25°C/70%
EMC Emission	Compliance to EN55015
EMC Immunity	Compliance to EN61547
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2

OTHERS


DIMENSIONS	138 x 42.5 x 34mm (L x W x H)
Weight	360g

EAN



1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Suitable for indoor or outdoor use. Please avoid direct exposure to sunlight and immersion in water for over 30 minutes.
6. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

© MECHANICAL SPECIFICATION

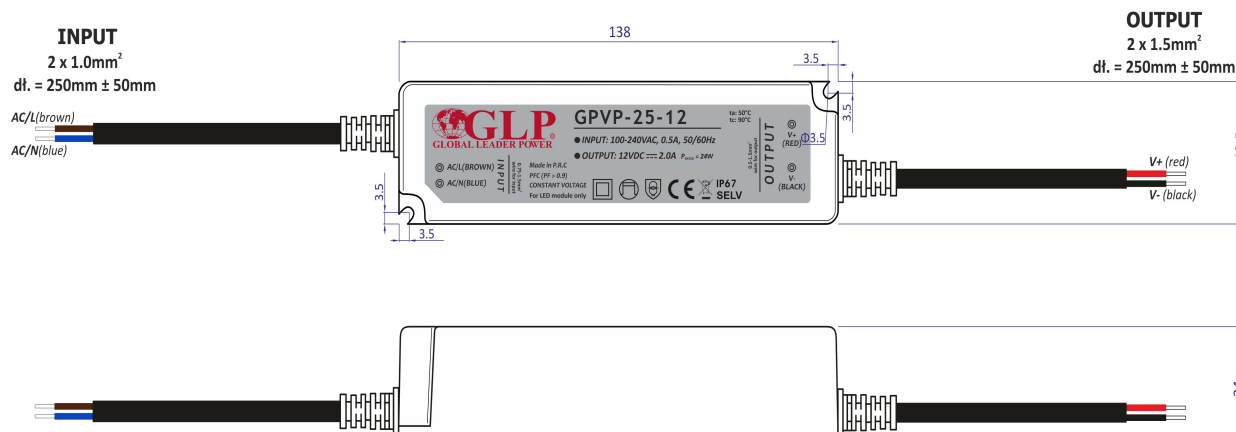


GPVP-25 series

25W Constant Voltage LED Power Supply with PFC function



©DERATING CURVE

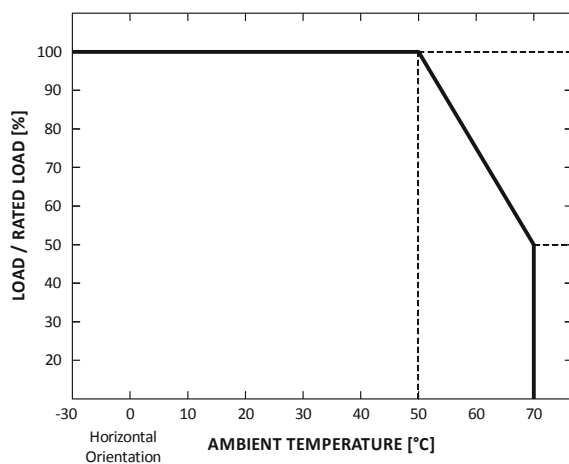

©STATIC CHARACTERISTIC

